



Creating healthy spaces

CLOSED AESTHETIC CLADDING

Linius® CL

Closed blades

Type L.033CL - L.050CL - L.066CL



patented technology



Linius® CL – Closed blades

DESCRIPTION

The main feature of the Linius® L.033CL, L.050CL and L.066CL systems is the fact that they are closed. Unlike all standard louvre systems, they form a closed barrier that provides privacy, keeps out vermin, and limits water and air penetration to an absolute minimum.

MATERIALS

Aluminium extrusion, EN AW-6063 T66 alloy

SURFACE TREATMENT

- Anodised (20 microns) F1
- Polyester powder coating (60-80 microns) in RAL colours

APPLICATION

This patented solution is suitable for a fully or partially sealed continuous louvre system, without additional parts or assembly time. These types of closed blades combine perfectly with standard blades L.033.01, L.050.01 or L.066.01. An additional benefit of this system is its high rigidity, which makes it suitable for larger unsupported spans and more resistant to vandalism.







DOORS

Single and double doors are available with the standard RENSON® finish hardware and rotating on pivot.

TECHNICAL DATA

- **L.033CL**
Pitch : 33,3 mm
Depth : 20,5 mm
Height : 38,2 mm
Max. unsupported span between two mullions* : 1.400 mm
Blade support : Single blade support : Type L.033.11
Double blade support for thermal expansion : Type L.033.12
- **L.050CL**
Pitch : 50 mm
Depth : 41 mm
Height : 60 mm
Max. unsupported span between two mullions* : 2.100 mm
Blade support : Single blade support : Type L.050.110
Double blade support for thermal expansion : Type L.050.120
- **L.066CL**
Pitch : 66 mm
Depth : 55 mm
Height : 76,5 mm
Max. unsupported span between two mullions* : 2.300 mm
Blade support : Single blade support : Type L.066.11
Double blade support for thermal expansion : Type L.066.12

* At qb 800Pa wind pressure

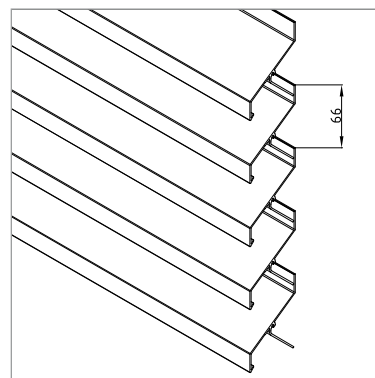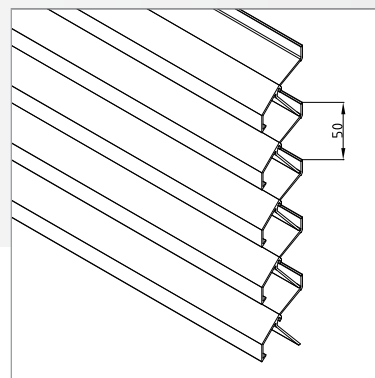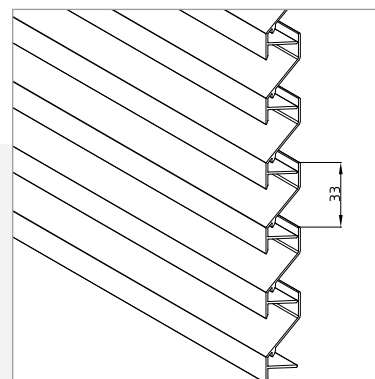

© RENSON® Sunprotection-Projects, Waregem, 2009

All rights reserved. No part of this publication may be reproduced, stored in an automated retrieval system or made available in any form or in any way, whether electronic or mechanical, including photocopying, recording or any other manner without the prior written permission of the author.

Conditional technical changes.
You can download the most recent version of this publication on www.renson.eu.

RENSON® Sunprotection-Projects • Industriezone 2 Vijverdam • Maalbeekstraat 6
Belgium • 8790 Waregem • Tel. 0032 (0)56 62 71 07 • Fax 0032 (0)56 62 71 47 • www.renson.eu

