

PRODUCT CATALOGUE

FACADE, ROOF AND COLUMN CLADDING







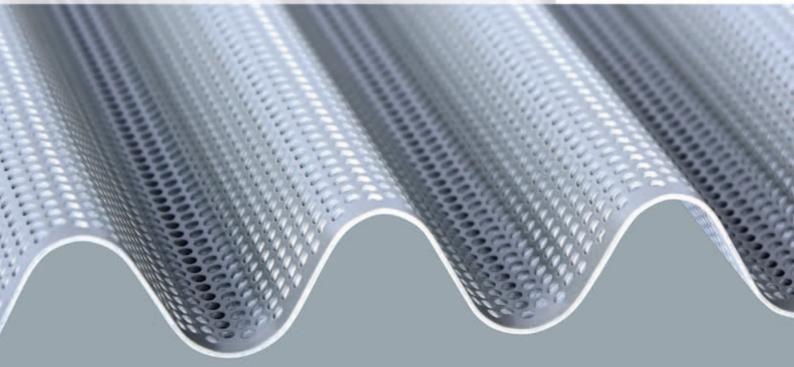



0.0

CONTENTS

wellTEC®	DESIGN PROFILES FOR FACADE, ROOF AND WALL	04 - 23
planTEC®	CASSETTE SYSTEMS, SHINGLES AND PERFORATED AND EMBOSSED SHEETS	24 – 39
colTEC®	COLUMN CLADDING	40 - 45
Special solutions	CUSTOMISED AND EXCLUSIVE BUILDING CLADDING	46 – 47
Flashings	CONSTRUCTION PROFILES IN ALL MATERIALS	48 – 53
Company	CONSULTING, PROJECT DESIGN AND PRODUCTION	54 - 55

Exclusive architecture design, from small features to functional industrial buildings: welcome to the world of MN Metall.

In order to offer this service portfolio with the highest levels of quality, exceptional flexibility and expertise are required. At MN Metall, this already begins during the project design and consultation stages, and stretches through production all the way to logistics.

The focus is always on an impressive range of top-quality products. MN processes a wide variety of materials, including aluminium, stainless steel, copper, steel and titanium zinc with diverse surfaces. Thanks to cutting-edge technol-

MODERN METAL PROCESSING


wellTEC® profile SP3G-50/60 R-115, AlMg1, anodised

ogy, profile sheets can be produced in maximum sizes and minimum thicknesses. This results in high-quality sheets for facade design, modern column cladding, cassette panels and shingles, in addition to functional perforated and embossed sheets for walls or ceilings.


Discover the virtually endless options available for building cladding, too.

Learn more about our dimensionally precise system solutions or contact us if you require customised production.

Whether serial production or project business, MN Metall looks forward to taking care of your requirements with meticulous accuracy, creativity and reliability.

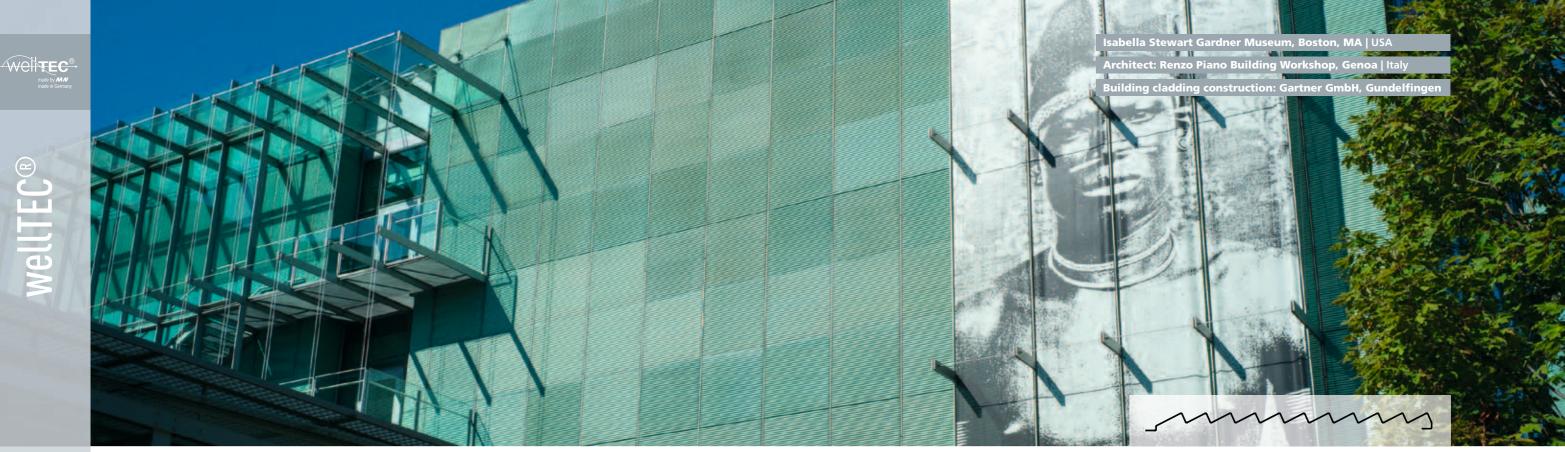


AS DIVERSE AS YOUR IDEAS wellTEC® DESIGN PROFILES FOR FACADE, ROOF AND WALL

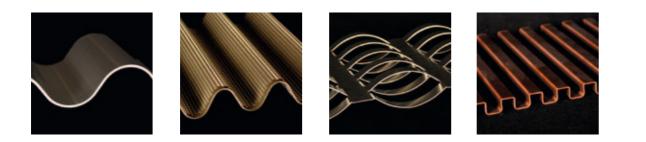

wellTEC® design sheets now distinguish an everincreasing number of iconic buildings both at home and abroad due to the wide variety of products and the flexible profile processing that meets practically every requirement imaginable. From standardised corrugated, trapezoidal or zigzag profiles to customised production, wellTEC[®] is the ideal solution for modern building cladding. All metals are available with diverse surfaces, including variable grids and perforations.

Our expert team is also on hand to work with clients in the creation of customised, cost-effective solutions and designs, providing assistance all the way to production or even installation on suitable substructures. If you want to let your creativity run free in the design of your facades, roofs and walls without having to renounce high dimensional accuracy and product guality, wellTEC® design sheets by MN Metall are the solution for you!

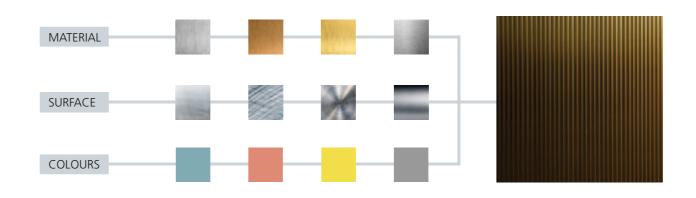

MATERIAL RANGE

Every building project presents different requirements in terms of construction, sustainability and design. To cater for this, wellTEC[®] design sheets can be produced in all metals. This includes aluminium, stainless steel, copper, steel, titanium zinc, brass and all other metals.

SURFACE RANGE

You decide which surface presents the optimal solution. wellTEC[®] design sheets are available in every finish imaginable, from stained, polished and sandblasted to patterned, anodised or etched.

wellTEC[®] profile SZ-14/33, copper patina

COLOUR RANGE

Everyone has different tastes. It's just as well, then, that alongside our exhaustive selection of materials and surfaces, we also offer an extensive array of colours. MN Metall supplies structures in all RAL colours and shades as highquality PE or PVDF paints.

WellTEC®



OTHER ADVANTAGES OF wellTEC®







CUSTOMISED SOLUTIONS

Let your ideas run free. The wide range of options presented by wellTEC[®] results in more than 60 basic shapes that can be combined as required. It goes without saying that we can also tailor profiles in terms of length, dimensions, perforations and shapes to suit you. Upon request, wellTEC[®] design sheets can be produced in lengths or widths of up to 5,500 mm and

in thicknesses from 0.5 mm to 5 mm. They are available with concealed fixtures and can be produced to meet the specific conditions of the construction site in question or supplied as complete components. And if you are looking for special sizes in other materials, just let us know – we'd be delighted to help!





Spandau ICE train station

Panel length

WIDTH

Cutting-edge machine technology and a high degree of expertise enable the production of special sizes with low tolerances.

DESIGN 1

Width: ~1,000 mm (depending on profile shape) Panel length: max. 3,000 mm or 5,500 mm (depending on profile shape)

Irregular zigzag profile SZ-25/50-R, reflective, brass






Station platform roofs, type GMP-1

DESIGN 2 Width: max. 5,500 mm (depending on profile shape) Panel length: max. 1,500 mm (depending on profile shape) weiltec








Canopy with precision butt joints for the entrance area of the ZKM Center for Art and Media in Karlsruhe


PERFORATIONS

The sky is the limit in terms of functionality and design: sheets can be supplied with complete or partial perforations.












New exhibition halls, Cologne: Cladding with a high-quality AlMg polyester coating

EDGING AND WEBS

wellTEC® profiles are distinguished by their variety of patterns and corrugated patterns.

These can be fixed with customised edging without the need for additional angles or sheets. This advantage also makes it easier to compensate for any unevenness in the construction.

Irregular special profile SQ-20/20-R, AlMg1, Sandalor[®] anodised

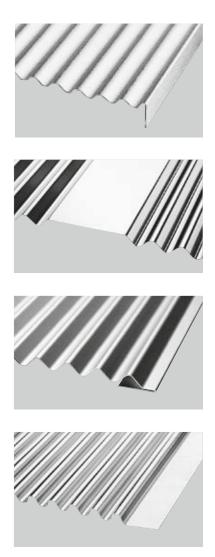






Dome of the Staatliches Museum in Schwerin, Mecklenburg-Western Pomerania

CURVES

wellTEC[®] design sheets are also available in a 'bowed' version. These are used for tunnel linings, special railway wagons, canopies, etc. Bowed sheets are also available with tapering towards one end, also making wellTEC[®] an excellent option for cladding domes.

Sheet thicknesses:	t = 0.5–1.0 mm
Smallest radius	t = 0.5 mm = 3,000 mm
With sheet thickness:	t = 0.7 mm = 1,200 mm
	t = 1.0 mm = 1,000 mm

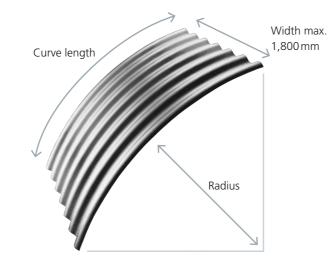



Aluminium and titanium zinc corrugated bowed sheets, tapered to one side for domes



Facade cladding of the IMAX pyramid in Eilat, Israel

Practically all profile shapes are possible

DIAMOND PATTERN

wellTEC[®] design sheets can be produced in practically all profile shapes. Depending on the requirements, a diverse range of diamond patterns can be used to create a bulky or fine surface structure.


wellTEC[®] W-27/100, AlMg1, painted in two colours




WeitteC®

wellTEC[®] Group W Corrugated profile sheets

wellTEC[®] Group W Corrugated profile sheets

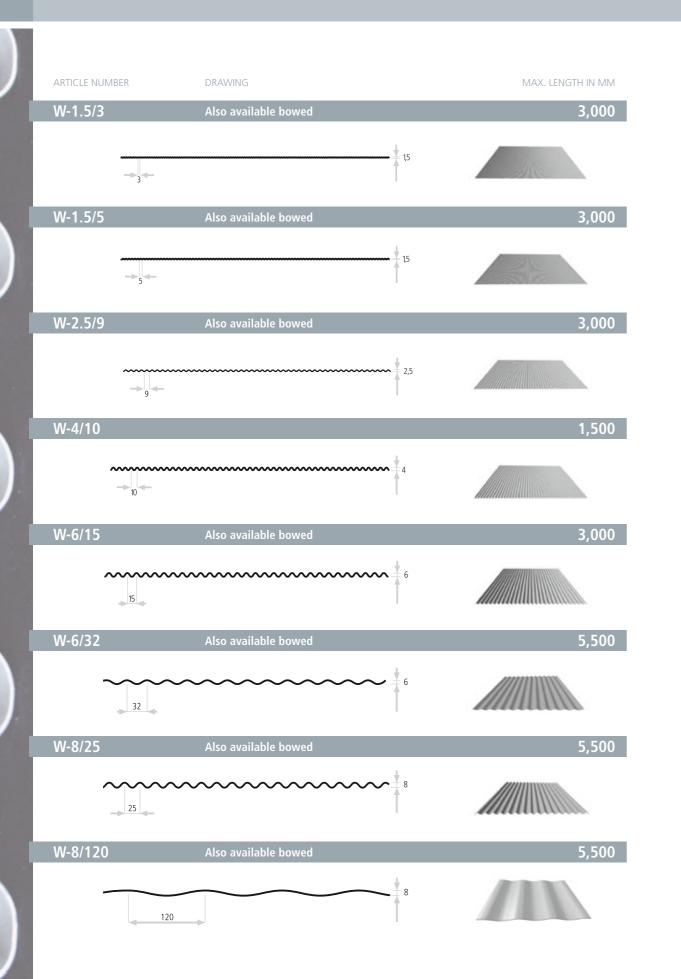

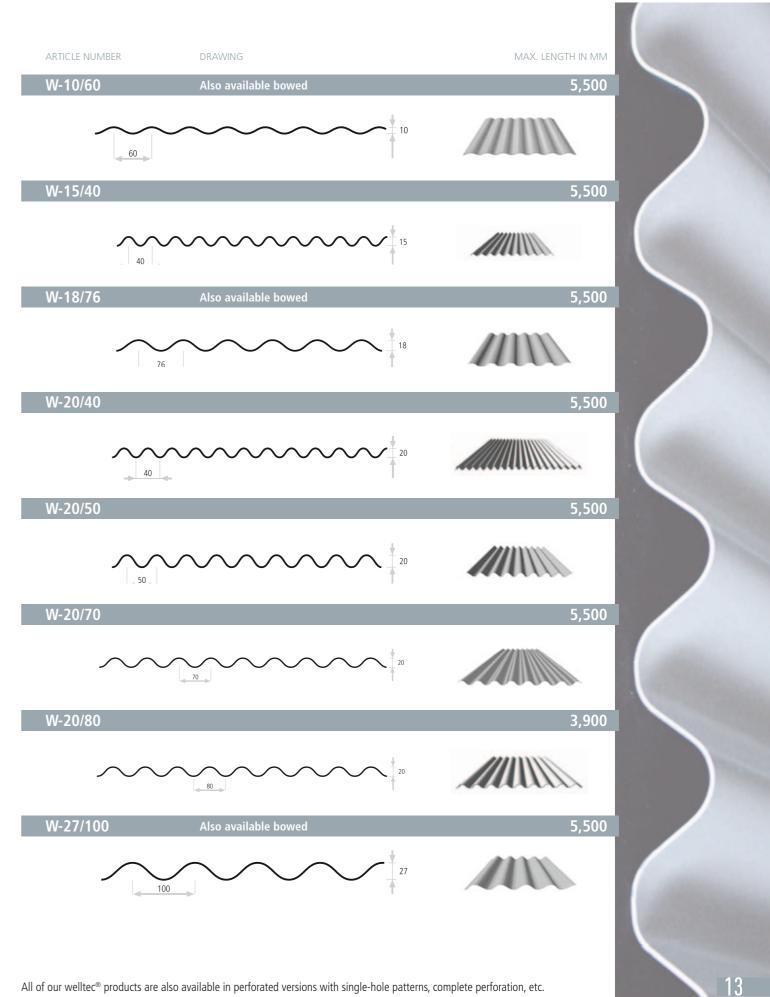







Well TEC®.

wellTEC[®] Group W Corrugated profile sheets

wellTEC[®] Group T Trapezoidal profile sheets

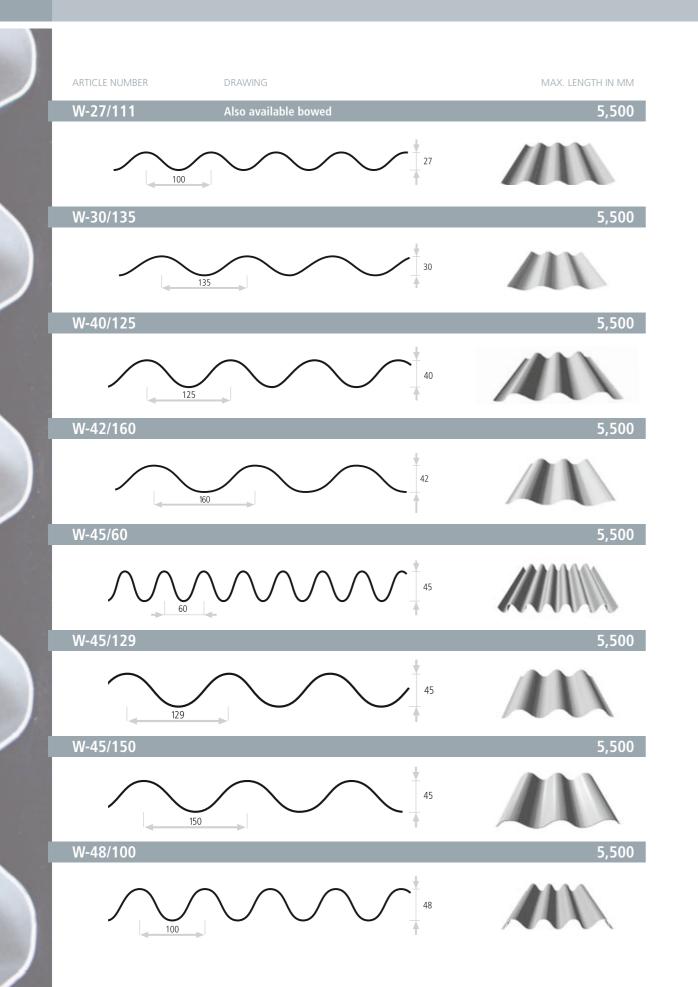

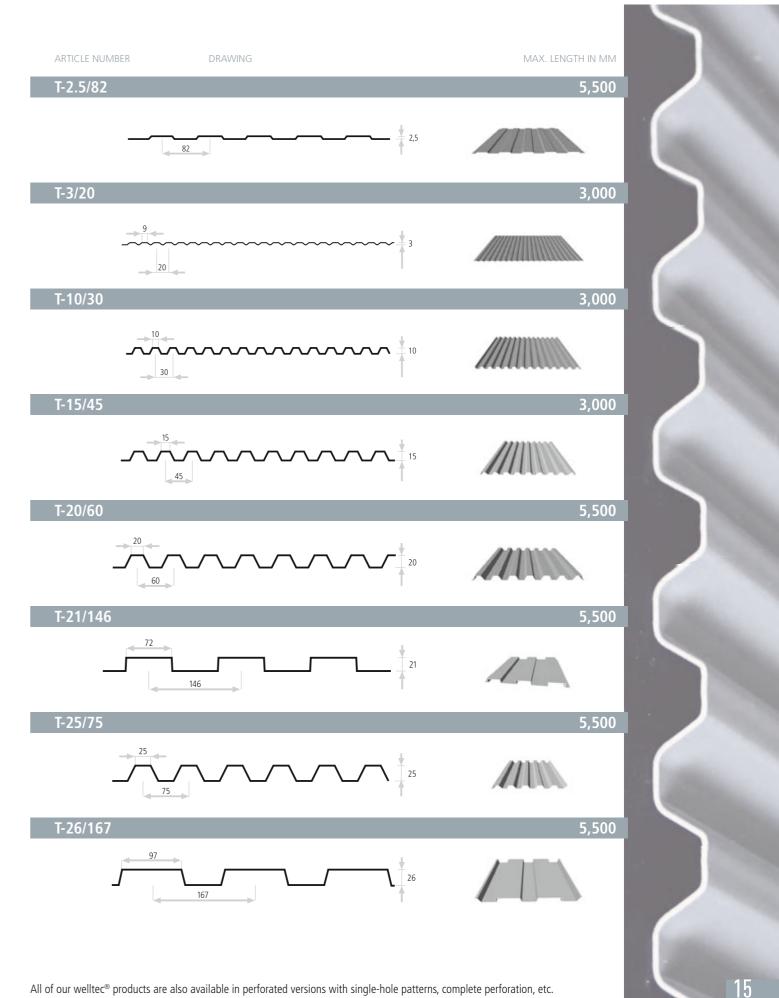









Well TEC®.

wellTEC[®] Group T Trapezoidal profile sheets

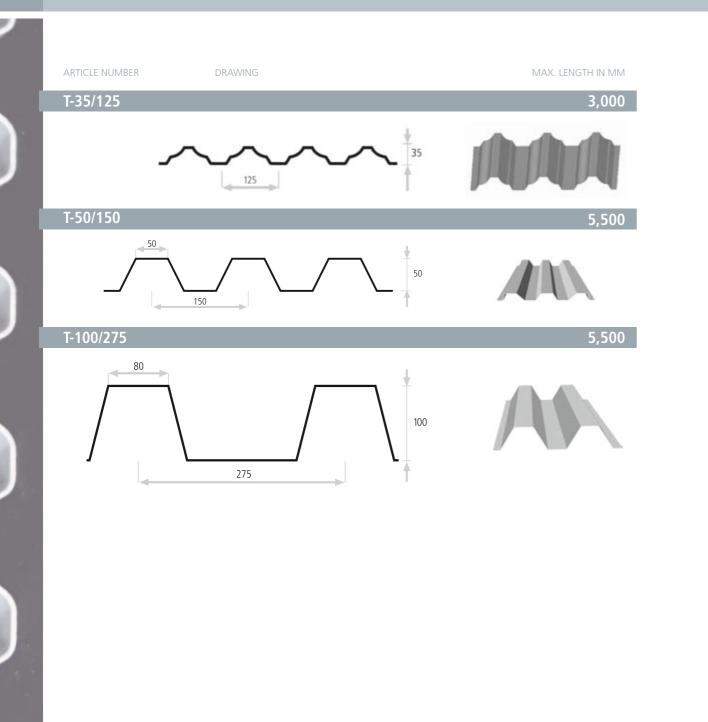

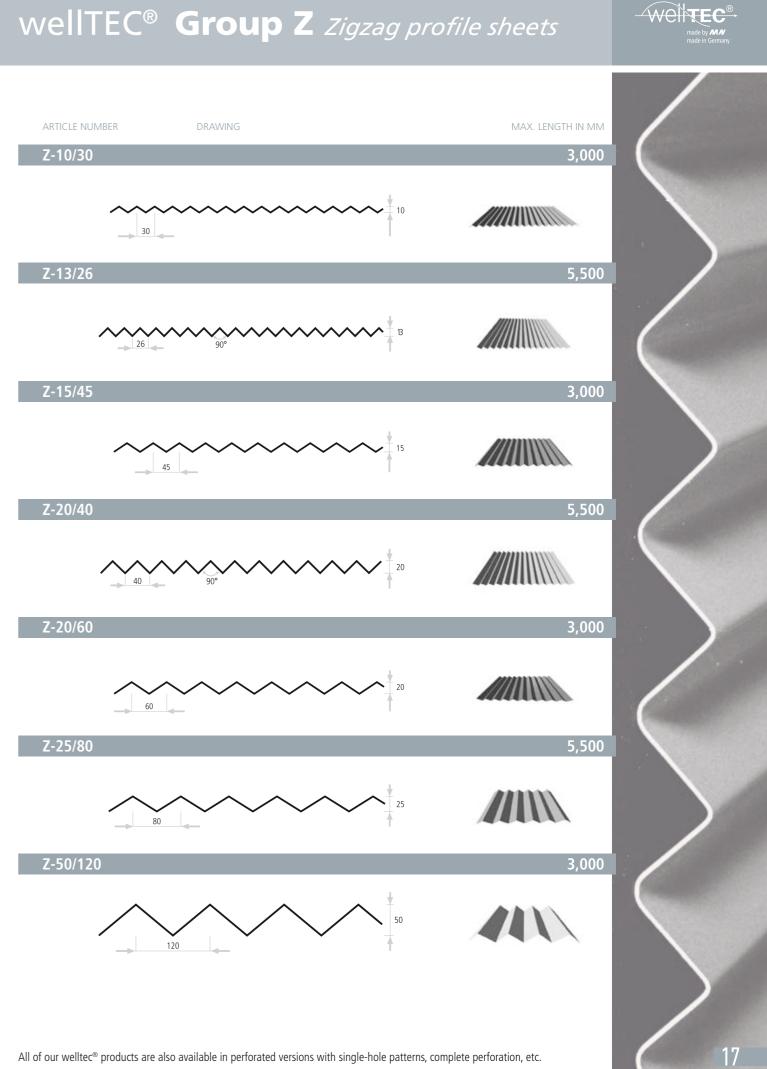


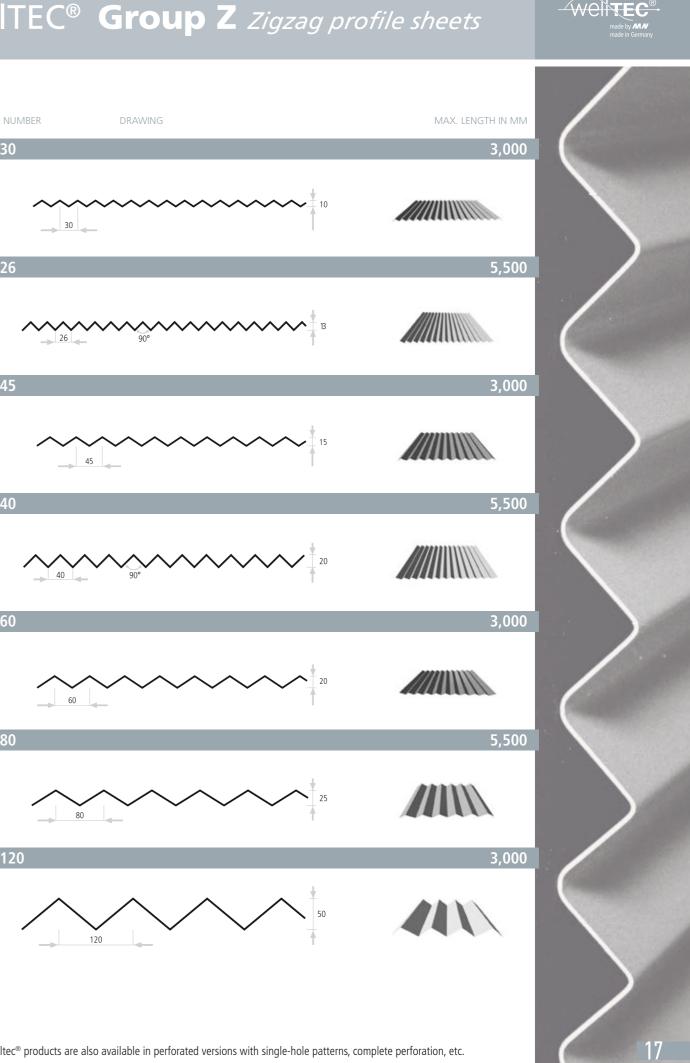


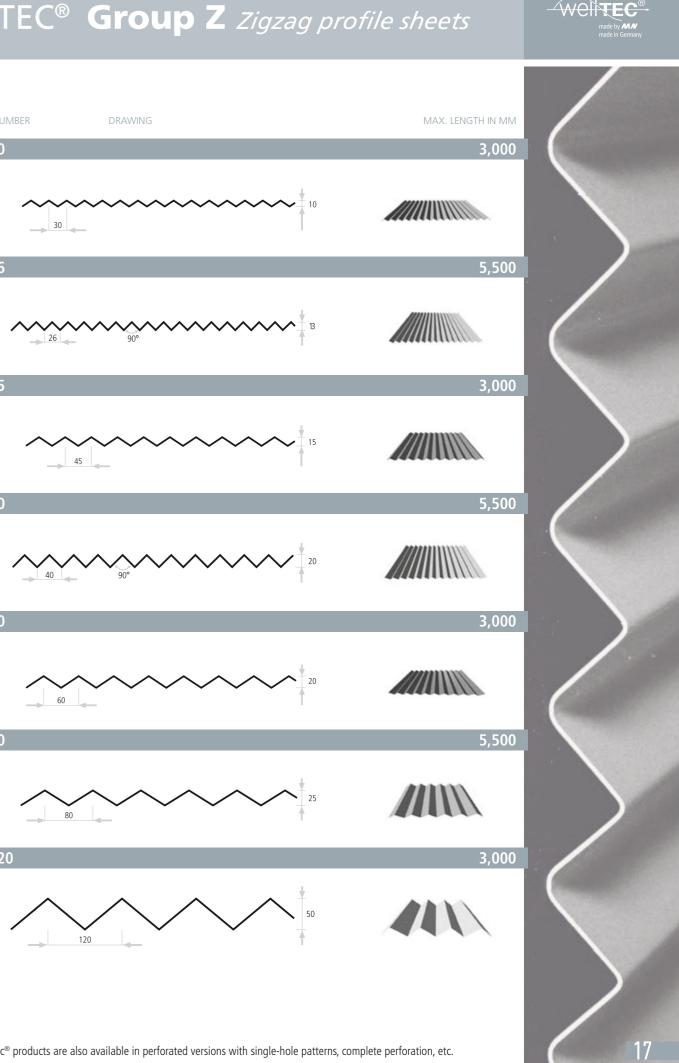

Well TEC®.

wellTEC[®] Group S Special profile sheets

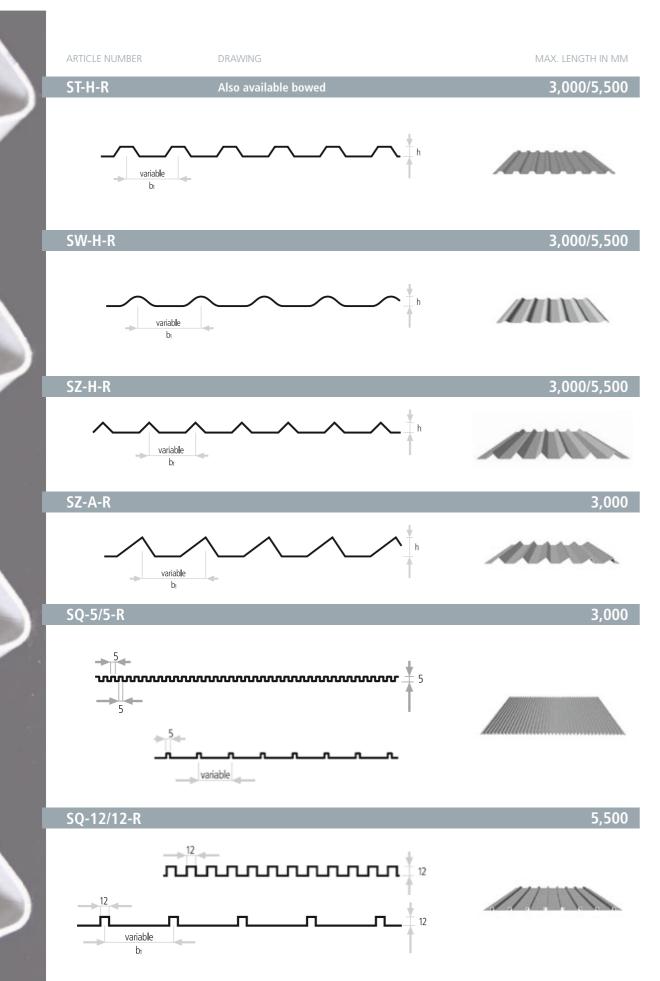


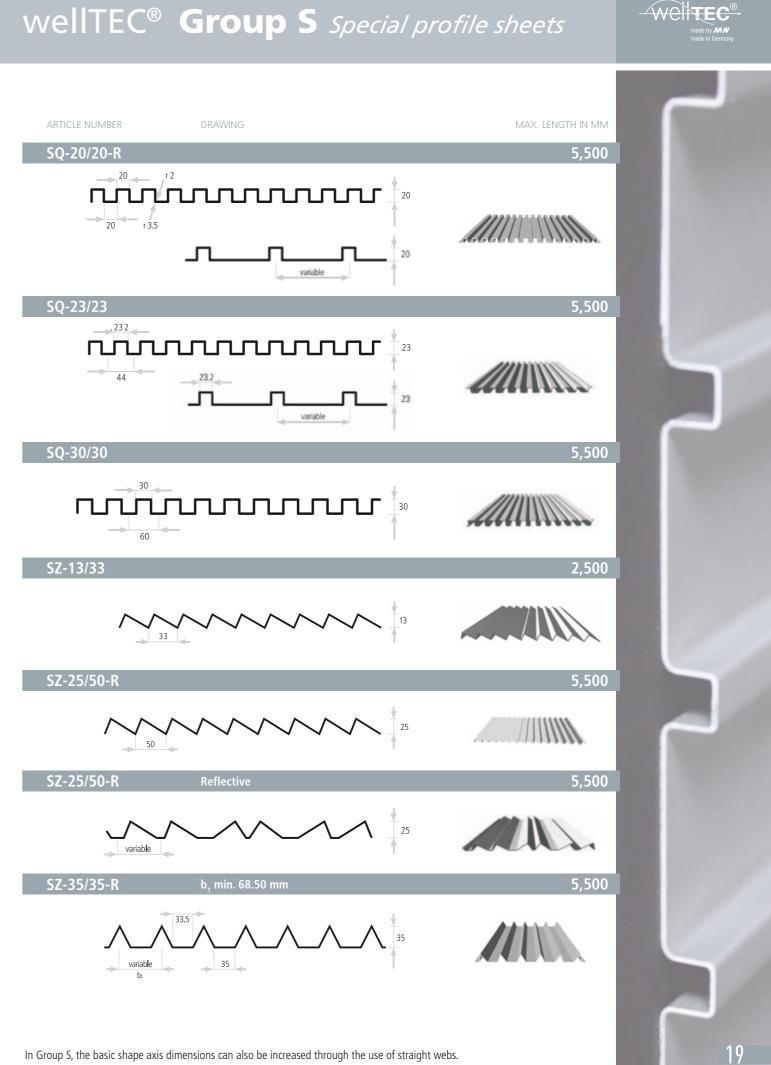


WellteC®.

wellTEC[®] Group S Special profile sheets

wellTEC[®] Group SP Special profile sheets

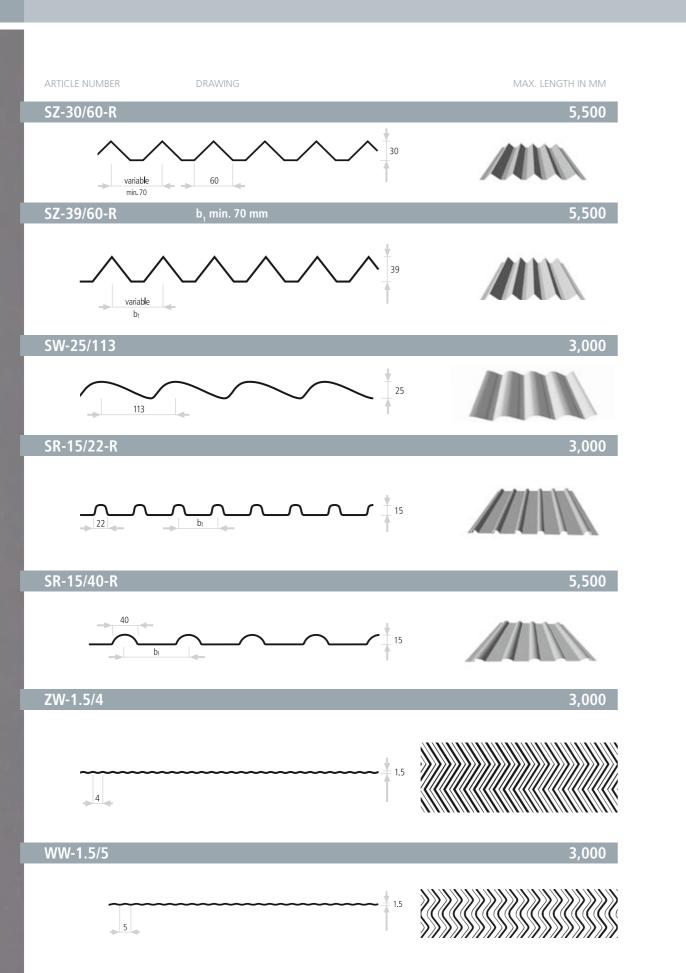

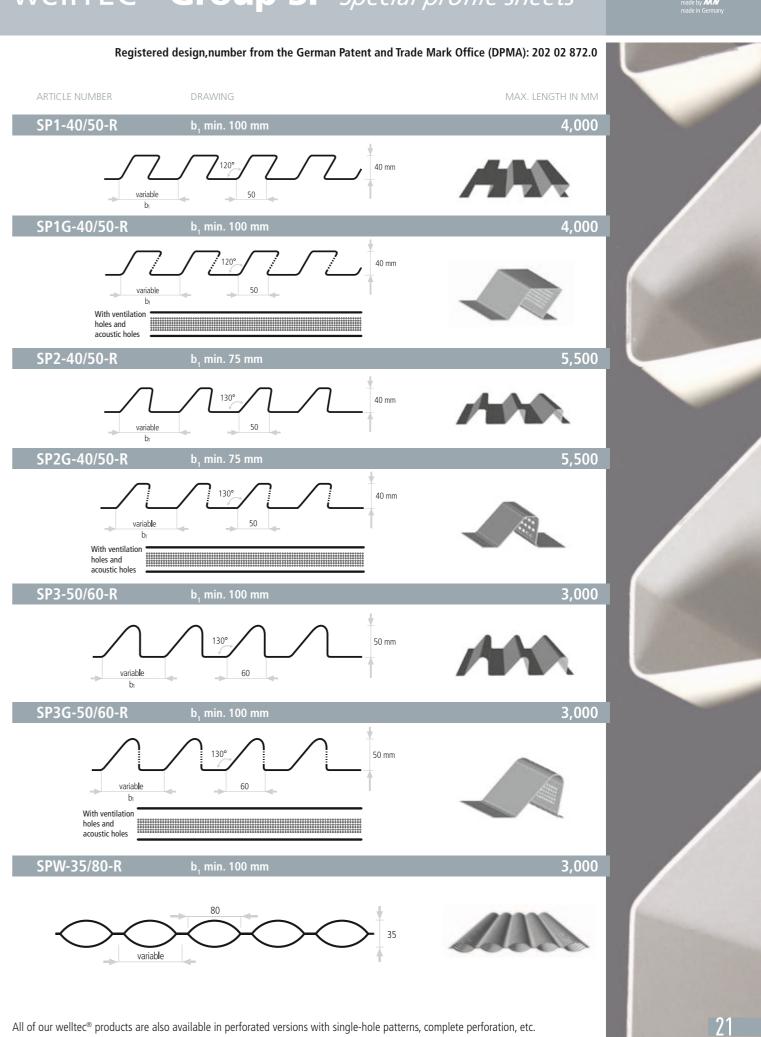

WellteC®



Extruded profiles

Giga[®] cassette systems


Extrusion enables the production of profiles with very or automotive industries. Through powder coating, als into extruded panels for use in the construction accordance with the RAL and NCS charts.

complex shapes. MN processes a wide range of met- the profiles are also available in customised colours in

ARTICLE NUMBER DRAWING W-6/15 Standard profile 203.17 Total width


W-6/15 Lower flashing $\Box \Delta$ is inserted into profile W-6/15

Giga® cassettes by MN Metall are variable modular list form the basic MN range and are also available as systems. The cassettes are available in lengths of up a perforated version. Please do not hesitate to contact to 3,000 mm. The profile forms shown in the product us if you have any questions.

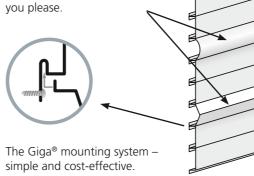

Highlight facades by combining

Giga[®] profile shapes as

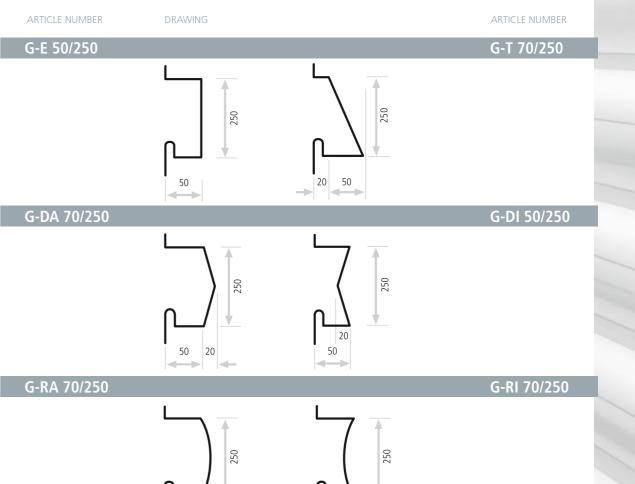


50


50



An alternating arrangement of convex and concave profiles also creates waves in new size dimensions.




23

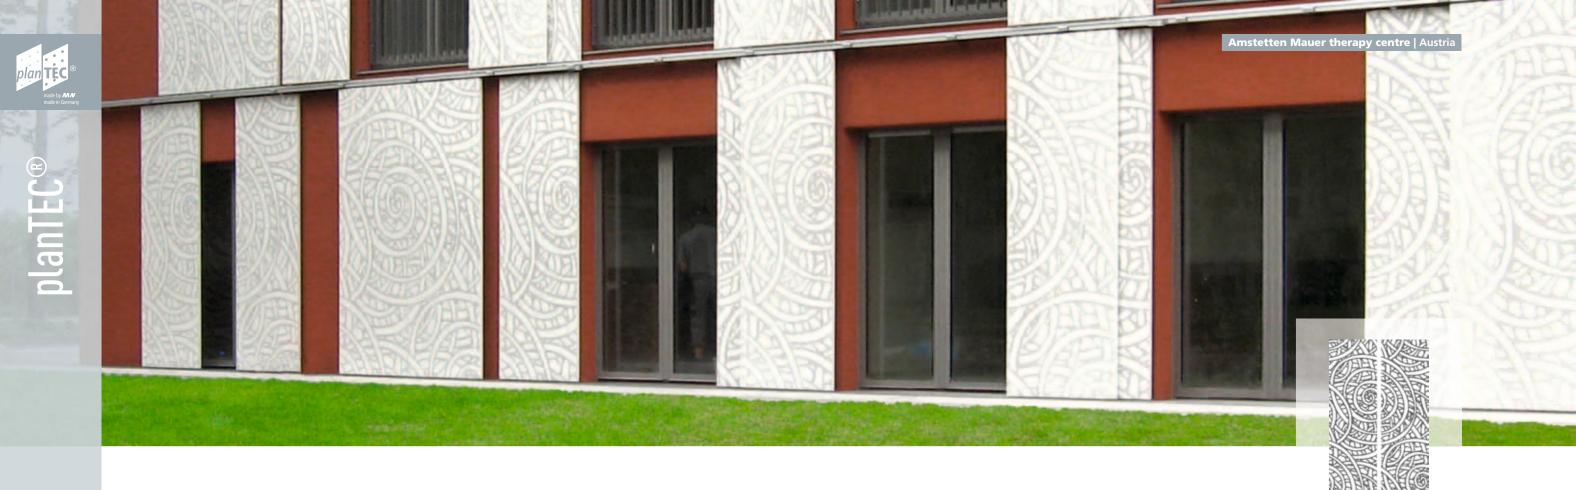


DESIGN MEETS FUNCTIONALITY planTEC[®] DESIGN PROFILES FOR WALLS, CEILINGS AND FLOORS



Hard Turm Park, Zurich




Hotel Prinz Albert, Luxembourg



Hotel Prinz Albert, Luxembourg

The product overview presents just a few examples of the planTEC[®] range. In addition to standard perforations, MN also produces custom-designed, variable patterns using all sheet types and surface coatings. Ask us for advice without any obligation – we look forward to discussing your requirements with you!

DIVERSE PERFORATIONS AND EMBOSSING





Perforations in offset rows

Round studs in offset rows

Thanks to our state-of-the-art production technology, we can create practically any perforated design. Whether round, square or long-hole perforations, clients have a variety of options concerning hole quantity and usable spaces. Ample scope for architecture and design is also provided by a wide selection of embossed patterns and combined


shapes, such as perforations with embossing. Using our basic elements, such as a square perforation measuring 10×10 mm or a round stud with a basic diameter of 12 mm, you can generally determine the patterns by yourself by specifying the grid or distribution of irregular patterns and the position of individual elements.

With their versatile patterns, planTEC[®] perforated and embossed sheets by MN offer an exhaustive range of cladding options for walls, ceilings and floors. With a regular structure, asymmetrical design or customised patterns, they not only serve as an optical eye-catcher, but also provide a high degree of functionality. For example, perforated sheets can be used for acoustic insulation and backlighting, whilst embossed sheets can be supplied with high load-bearing properties





Round studs with various diameters and embossing depths

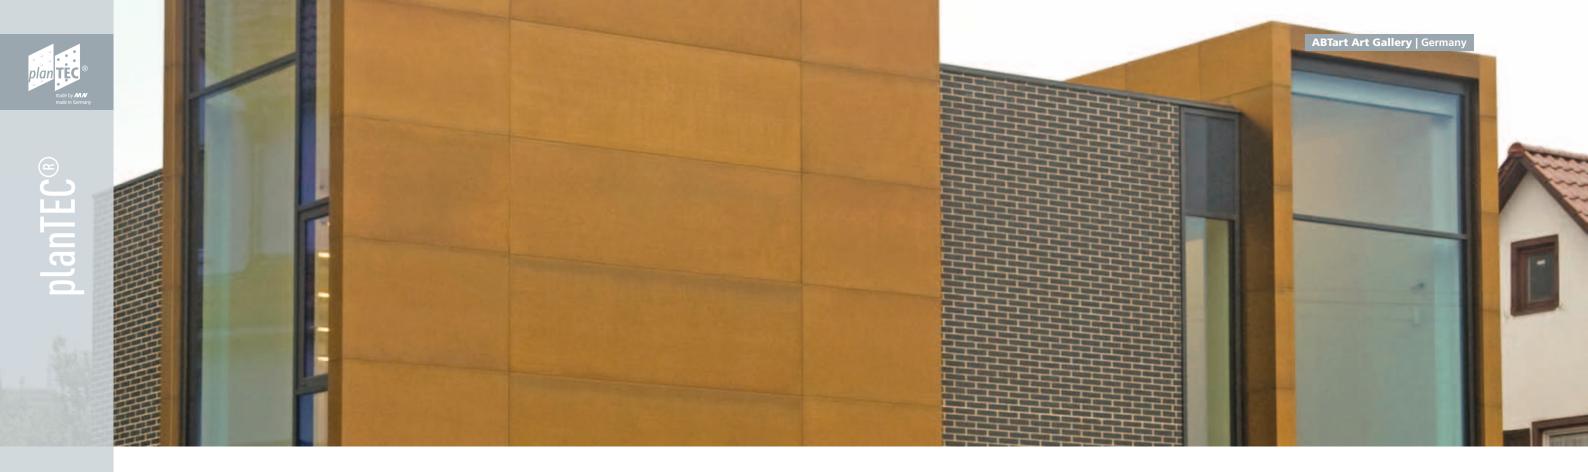

OTHER ADVANTAGES OF planTEC®




Window shutters/sun shade made of perforated sheet

IMPRESSIVE DIMENSIONS AND FLEXIBILITY

planTEC[®] perforated and embossed sheets are available in special lengths of up to 7,000 mm and material thicknesses up to 20 mm. Customised productions with extremely tight manufacturing tolerances are also possible. The diverse range of materials and possible applications of planTEC®, in addition to the high dimensional accuracy in production, demand the highest precision and flexibility when it comes

to fixing. planTEC[®] perforated and embossed sheets can be fixed in a wide variety of ways in accordance with the specific construction conditions at hand. If desired, profiles can also be fitted with concealed fixings and can be produced to meet the specific conditions of the construction site in question or supplied as complete components.





Cassettes

MATERIAL RANGE

In interior design, style options are endless. This is why planTEC® perforated and embossed sheets can be produced using all metals. This includes aluminium, stainless steel, copper, steel, titanium zinc, brass and all other metals.



Shingles

SURFACE RANGE

Your design ideas and functional requirements are important to us. As a result, planTEC[®] design sheets are available in all finishes, for instance stained, polished, sandblasted, textured, anodised or etched.




Perforated/embossed composite panels

COLOUR RANGE

Stability and safety are paramount factors with planTEC® profiles by MN. High-quality paint in all RAL colours and shades guarantees a perfect appearance.



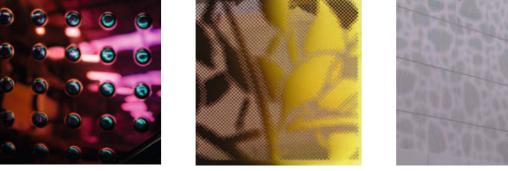




DETAILED PRINT PERFORATION

The times when building cladding was based on rigid grids are undoubtedly over. Now, with the help of print perforation technology, a large array of photos or graphics can be used as templates for facade elements. Thanks to cutting-edge machine technology, MN Metall embosses, cuts and perforates all metals, can be used with diverse surfaces and creates highly detailed designs. This enables architects to think more creatively and plan more freely in the development of facade cladding concepts.

During print perforation, original architect's drawings are generated by a CAD program that records all shapes, perforations and embossing. The result is digitally projected onto the building surface to be covered in order to simulate the effect and enable any readjustments to be made.

Next, the electronic pattern and structural data is transmitted to computer-controlled machines, which in turn create a detailed reproduction of the profiles. After their completion, the panels are custom-mounted onto the building substructure.





Photographic templates from the architect

Coordinate determination in CAD program

Thanks to print perforation, architects can use countless motifs as a template for facade cladding. This results in extremely creative and intricate building surfaces.




Digital simulation

Computer-controlled, machine implementation

28


planTEC[®] system cassette, AlMg3, perforated (Dimensions: 1,510 × 1,510 mm, thickness: 4 mm)







Division into parameters






Custom-mounting of the panels

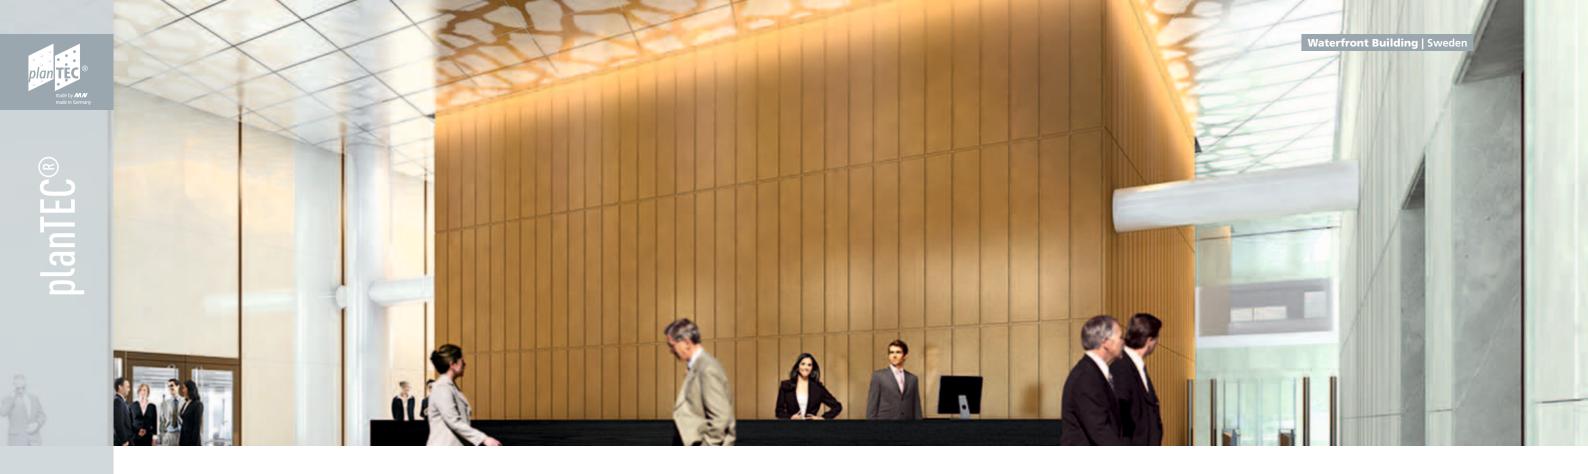

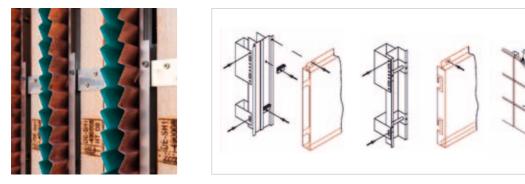



Waterfront Building, Stockholm/Sweden



Waterfront Building, Stockholm/Sweden

SYSTEM CASSETTES

MN system cassettes can be produced from 2,000 mm coil width to a length of up to 6,000 mm and a material thickness of up to 6 mm. Both shape and size can be selected as required by the client, and smooth, perforated or embossed surfaces are all possible.

wellTEC[®] and planTEC[®] products are generally compatible with all standard substructure systems from many well-known manufacturers. We offer special solution support during the development and production of customised substructures.





Waterfront Building, Stockholm/Sweden






Metal facade with customised positive/negative embossing, creating diverse light reflections.



Diamond-shaped shingles system with special surface structure






Checked shingle shape

Diamond shingle shape


SHINGLES

Shingles by MN Metall offer a high degree of flexi-bility. They can be customised in terms of height and width and are available with all design surfaces. The shingles are manufactured using aluminium, stainless steel, zinc or copper, and are fixed with the standard

adhesion procedure. For metal shingles with circumferential seams, the roof or facade surfaces are given clearly organised linear or diagonal structures through a choice of grids.

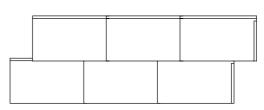



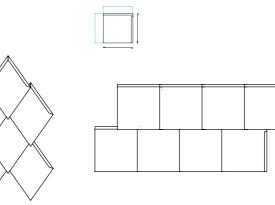


Square shingle shape

Direct mounting



planTEC[®] Types of embossed sheets planTEC[®] Types of embossed sheets

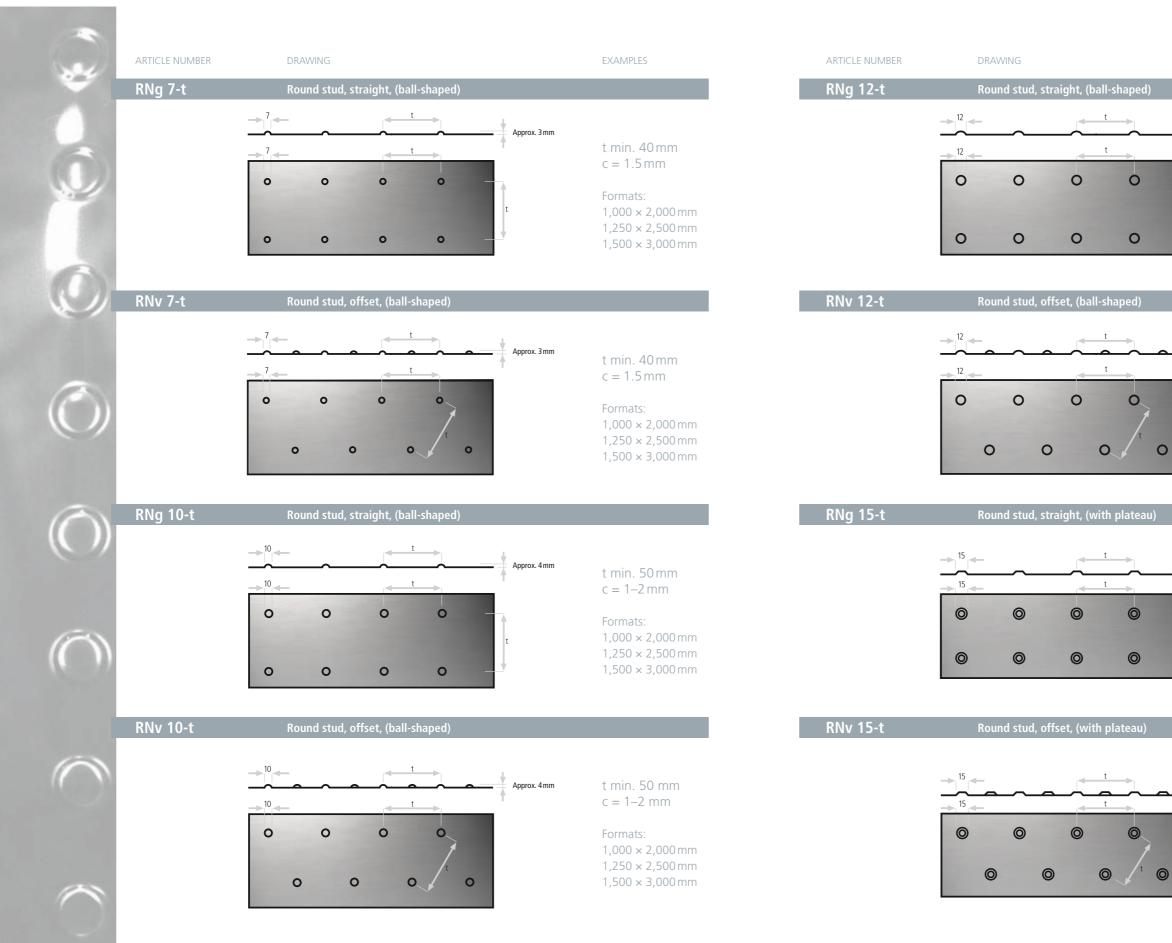

34







Approx, 5 mm

t min. 50 mm $c = 2 - 3 \, \text{mm}$

Formats: 1,000 × 2,000 mm 1,250 × 2,500 mm 1,500 × 3,000 mm



Approx. 5 mm

t min. 50 mm $c = 2 - 3 \, mm$

Formats: 1,000 × 2,000 mm 1,250 × 2,500 mm 1,500 × 3,000 mm

Approx. 4.5 mm

t min. 50 mm c = 2 mm

Formats: 1,000 × 2,000 mm 1,250 × 2,500 mm 1,500 × 3,000 mm

Approx. 4.5 mm


t min. 50 mm c = 2 mm

Formats: 1,000 × 2,000 mm 1,250 × 2,500 mm 1,500 × 3,000 mm

35



planTEC[®] Types of embossed sheets planTEC[®] Types of embossed sheets

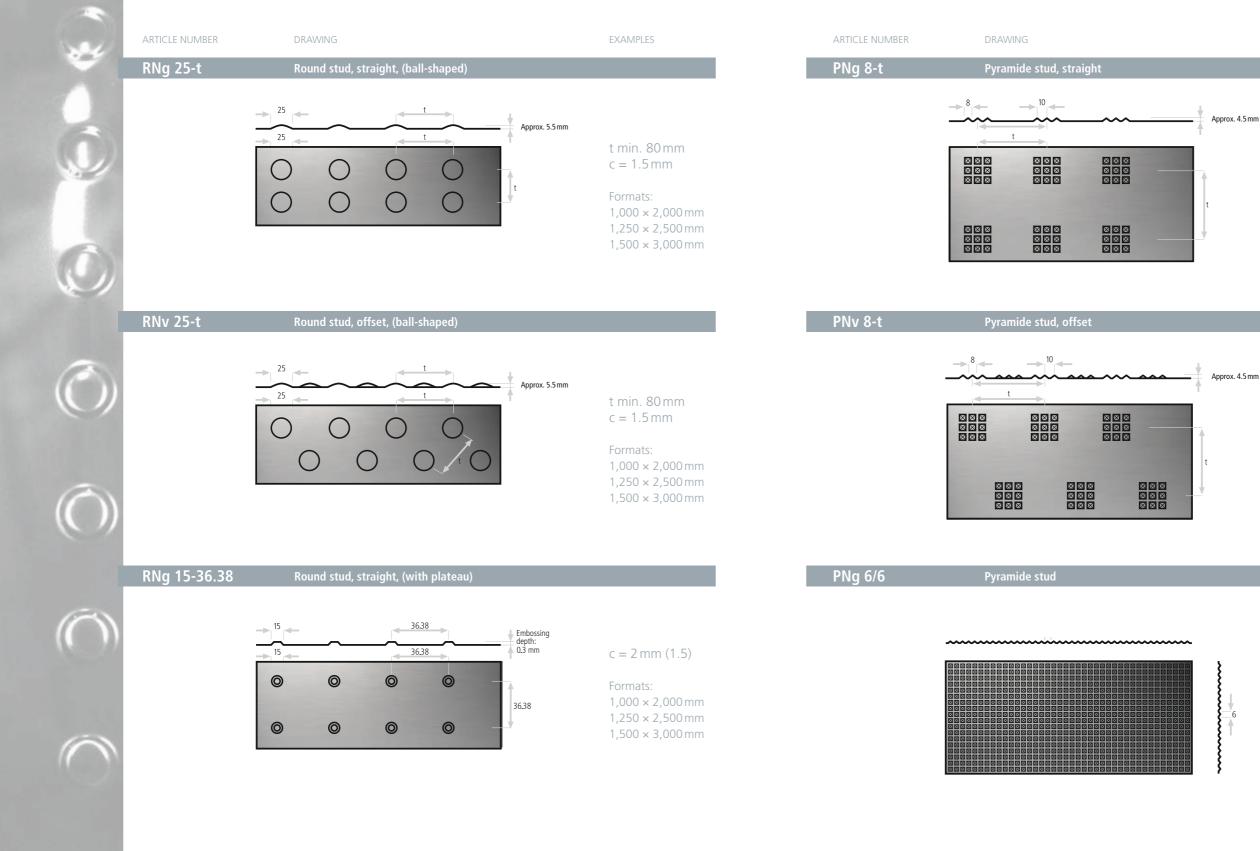



EXAMPLES

t min. 60 mm $c = 1.25 \, mm$

Formats: 1,000 × 2,000 mm 1,250 × 2,500 mm 1,500 × 3,000 mm

Approx. 4.5 mm

t min. 60 mm $c = 1.25 \, mm$


Formats: 1,000 × 2,000 mm 1,250 × 2,500 mm 1,500 × 3,000 mm

c = 1 mm

Length: 6,000 mm



planTEC® Types of embossed sheets planTEC® Types of embossed sheets

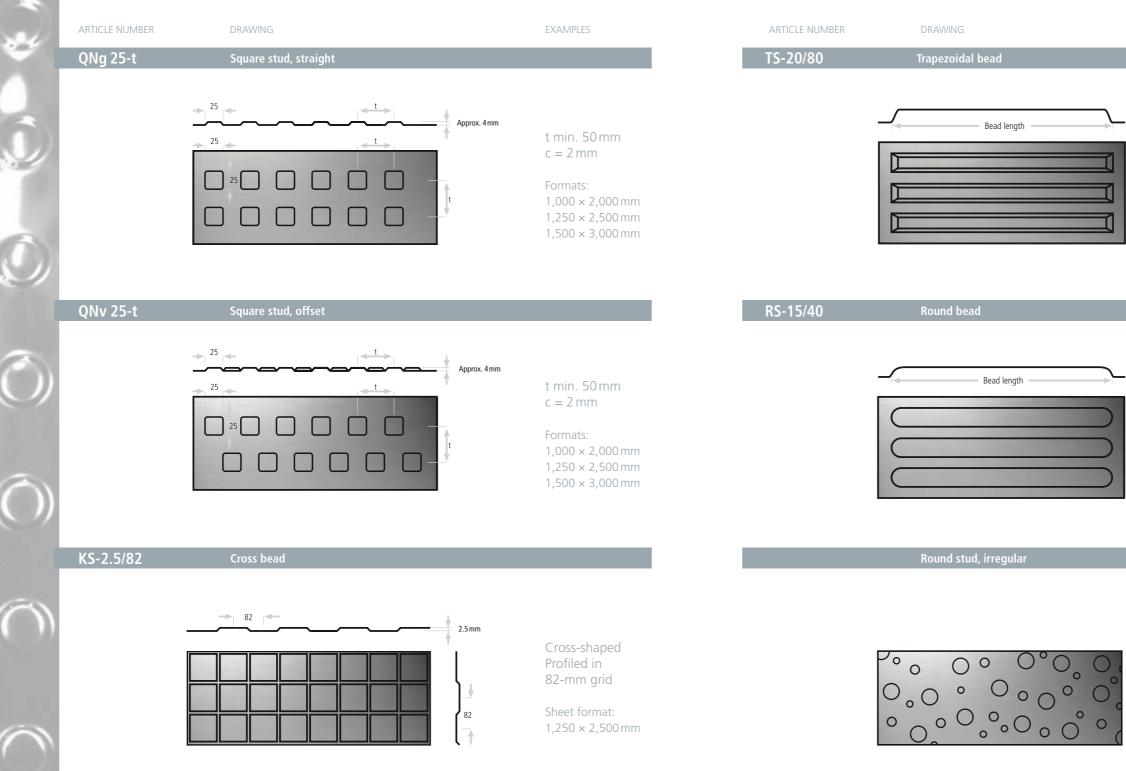

38



EXAMPLES

Bead lengths

444 mm 974 mm 2,174 mm

Bead lengths

1,000 mm to 5,000 mm

c = 1 - 2 mm

Formats: 1,000 × 2,000 mm 1,250 × 2,500 mm 1,500 × 3,000 mm



INFINITE APPLICATIONS, THE SAME HIGH QUALITY coltec® column cladding








colTEC[®] column cladding by MN can be used in a variety of different architectural settings. In public buildings, hotel foyers, hospitals and trade fairs, they serve to enhance the appearance of columns often used as static elements. The high-quality and modern design sheets can be made using all types of sheet metal with any surface coating. A variety of perforation

designs away from the norm is also possible. If necessary, functional elements such as switches or sockets can be integrated or special effects created through backlighting. Discover the infinite range of design and usage options presented by coITEC[®] design sheets and prepare to be impressed by high-quality and modern column cladding.

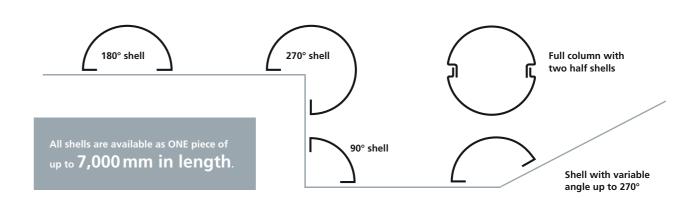

DIVERSE DESIGNS

colTEC[®] profiles can be produced up to a length of 7,000 mm and a thickness of 20 mm in one sheet. They offer an extremely flexible column cladding option, since alongside their classic use as full columns, they can also be employed

40

as half or quarter shells to adorn walls or corners. With the help of precise laser cuts, it is possible to smoothly integrate functional elements or achieve special effects through backlighting.






MATERIALS, SURFACES, COLOURS


colTEC[®] profiles create stunning effects in a large variety of models and materials. They can be produced using all metals, such as stainless steel, brass, steel, titanium zinc, aluminium and copper. The design sheets are also offered in all finishes imaginable, from stained, polished or sandblasted to textured, anodised or etched. In order to create harmony between the column and other architectural elements, coITEC® column cladding by MN Metall can also be painted in all RAL colours and shades.





FLEXIBLE JOINT DESIGNS

In the area of joint design, colTEC[®] column cladding can also be adapted to the specific requirements at hand. Joints can either be deliberately emphasised through shadow

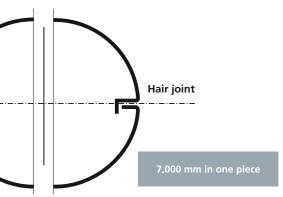


joints or subtly camouflaged by means of hair joints with concealed fixings. Pieces are produced without horizontal joints or spot welds on seams.



colTEC[®] Group R, Group E






TNIOL WODAHS


Direct mounting

D = Tubular column + 40 mm




Direct mounting

D = Tubular column + 120 mm




with screw-in U construction D = Tubular column + 140 mm



with screw-in U construction D = Tubular column + 220 mm

Compensating mounting

with clamp U construction D = Tubular column + 140 mm




with clamp U construction D = Tubular column


+ 220 mm

Distance mounting


RK-S round

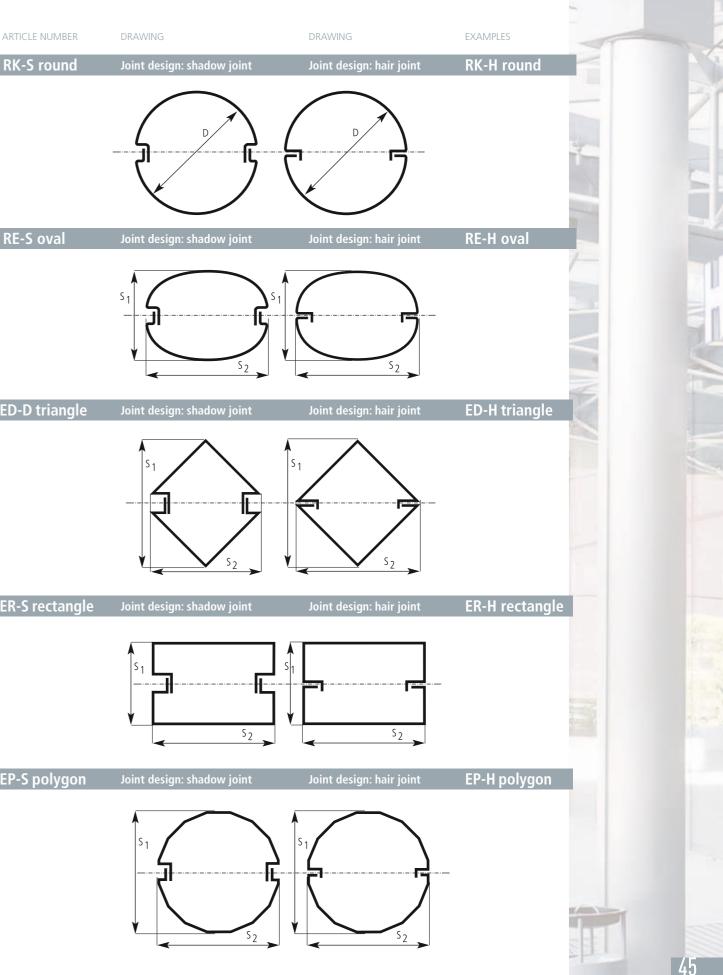

RE-S oval

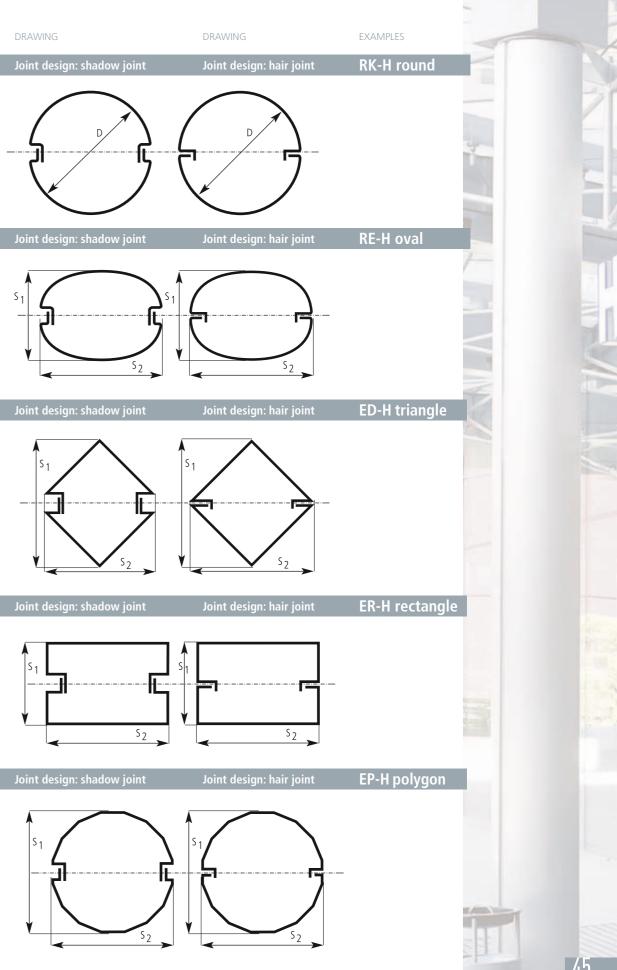


ED-D triangle

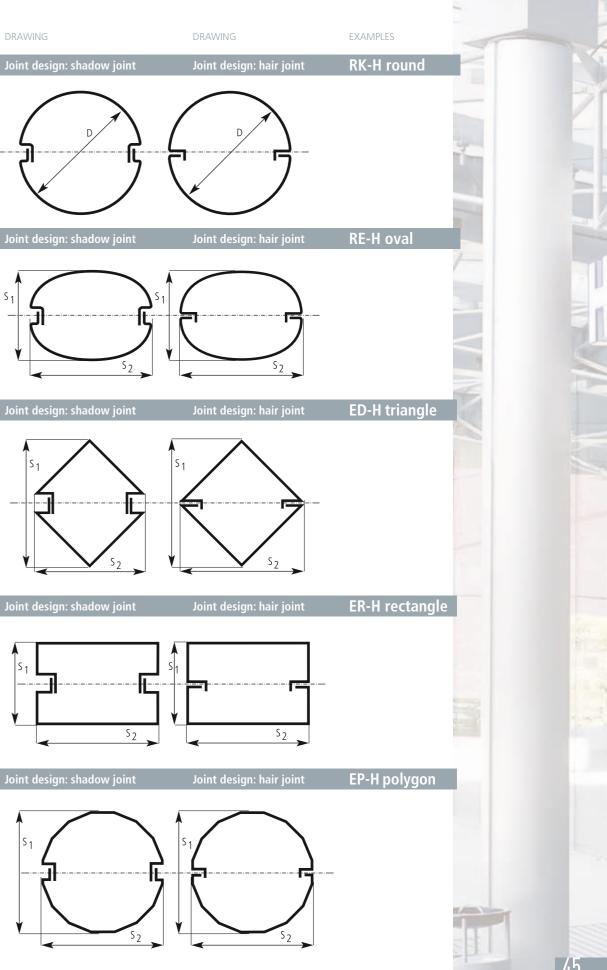

ER-S rectangle



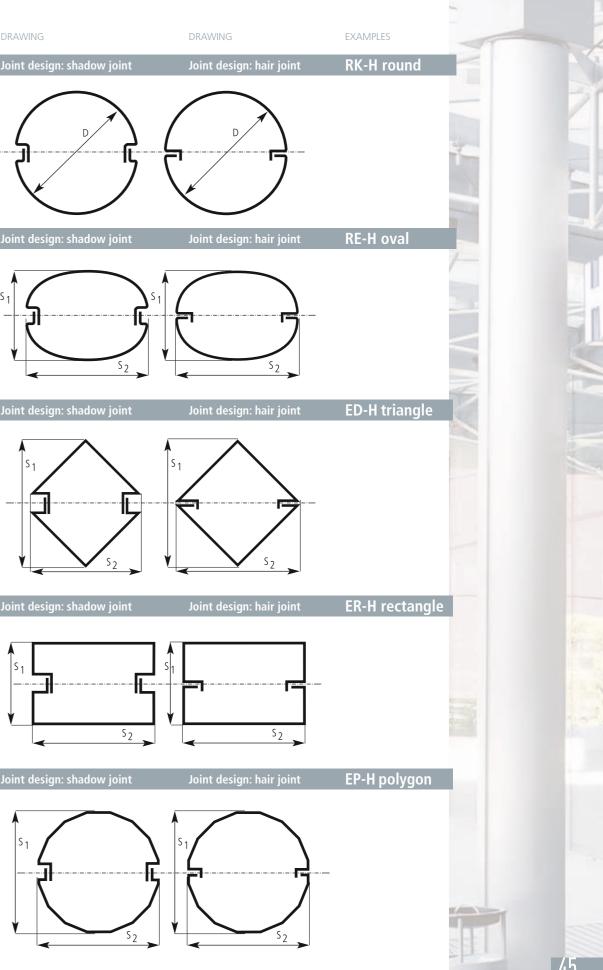


DIVERSE FIXING TYPES

colTEC[®] column cladding can be fixed in a wide variety of ways in accordance with the specific structural conditions. With direct mounting on the column substructure, it is possible to adjust various column shapes and dimensions to the column substructure using special top-hat and C profiles as spacers. If direct mounting on the

Direct mounting

column substructure is not possible, clamping devices represent the best fixing method. The illustrated options are only a few examples of the large selection of possible fixings based on your needs and requirements. All versions can be supplied with both shadow and hair joints.

EP-S polygon

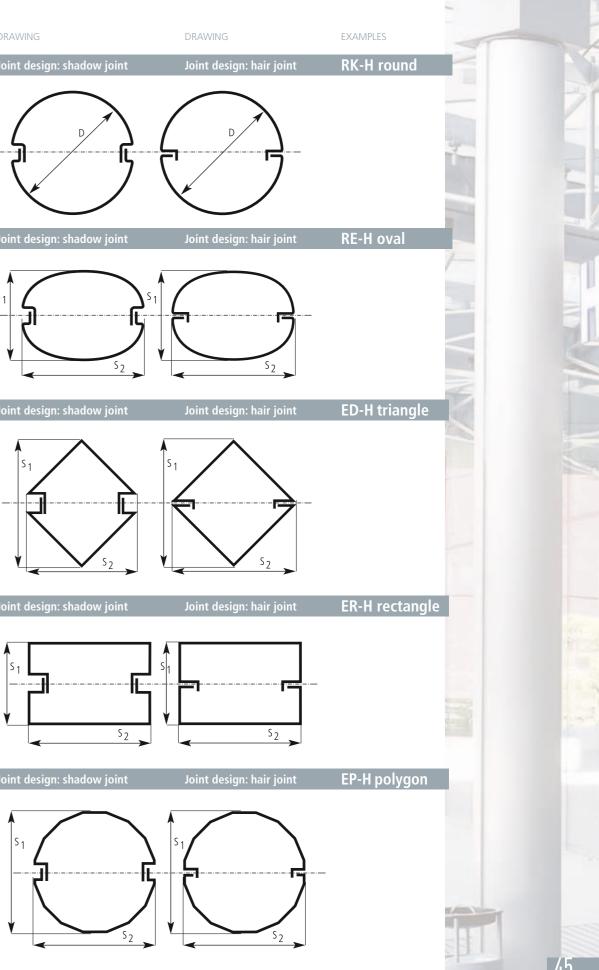

The column cladding included in our product list only represents our basic range. Please do not hesitate to contact us if you have specific requests. We look forward to your enquiry.











IMPRESSIVELY UNIQUE: MN SPECIAL SOLUTIONS

Alongside bringing its own products and advantages surface structure with multi-spectral colours, this to the fore, an inherent part of the MN corporate philosophy is to look for customised, dimensionally precise and cost-saving solutions and suitable designs for its clients. Our high level of customer satisfaction is per exterior of which develops a silky brown surface as proven by countless long-term business relations and it passes through the various stages of oxidation. different quality certificates.

Nowadays, striking aluminium profiles supplied by MN Metall can be seen on a number of iconic buildings designed by renowned architects, who consciously opt for these products based on their convincing properties. Such buildings include the Stockholm Arena in If you, too, are interested in high-quality and excluwhich is surrounded by a diamond-shaped metal facade supplied by MN Metall. Thanks to a special


cladding achieves a truly unique aesthetic effect. The same goes for the cassette facade of the Landeskirchliches Archiv in Nuremberg, the matt shimmering cop-

Another excellent reference is the NYA Nordiska industrial complex with its red anodised aluminium facade elements supplied by MN Metall. This construction project was selected by an expert jury to receive the Lower Saxony state architecture prize.

Sweden and the sculptural Festival House in Blackpool, sive special solutions in the area of building cladding, please do not hesitate to contact us!



Landeskirchliches Archiv, Nuremberg Exterior walls made of matt shimmering copper with a fine, vertical structure



Agrafe for 190 mm-wide cassette





Profile SZ-30/60 R75, (thickness: 1.5 mm), Aluminium, perforated, RV3-4 and unperforated The so-called *Röckli* (skirting) also serves as a sun shade

Cassette fixing, Landeskirchliches Archiv



Kulneva, Moscow

The 2,000 mm-wide basic material was dyed half in champagne, half in black using a multi-spectral process. It was then edged and relief-milled in one piece in order to obtain as low an edge radius as possible.





Flashings series E


Flashings series R | series B


thicknesses from 0.75 mm to 4 mm and lengths of up or shapes as required. to 5,000 mm. Special lengths up to 7,000 mm are also


Flashings by MN Metall can be manufactured using possible upon request. Profiles are cut to any desired all metals with any desired finish. They are available in length and can be prepared with specific perforations

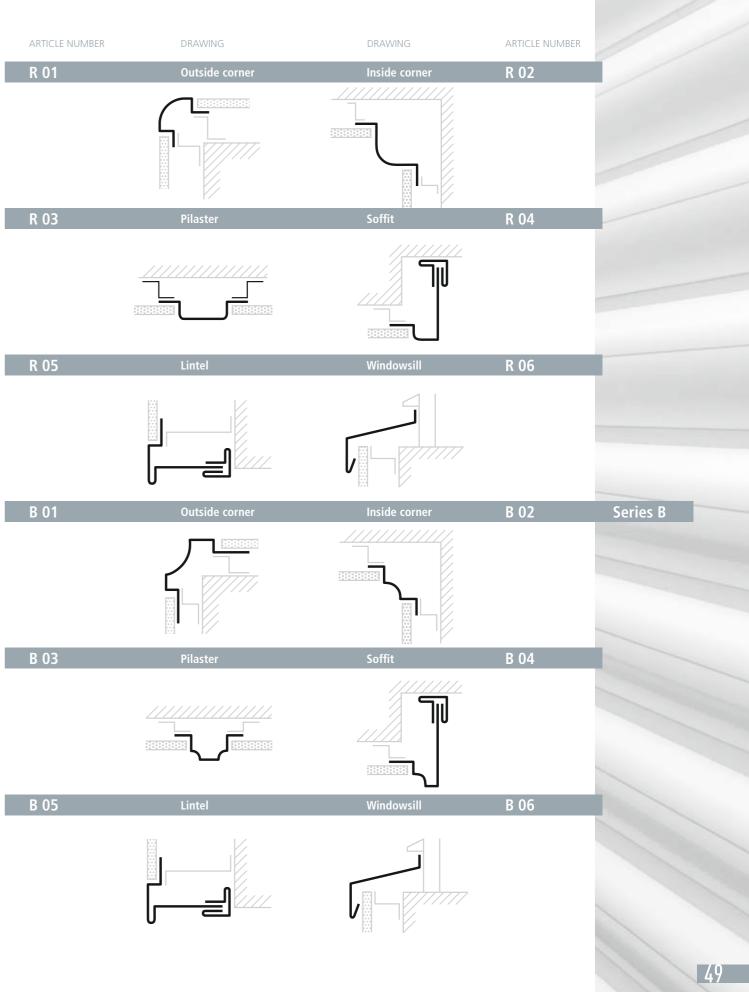







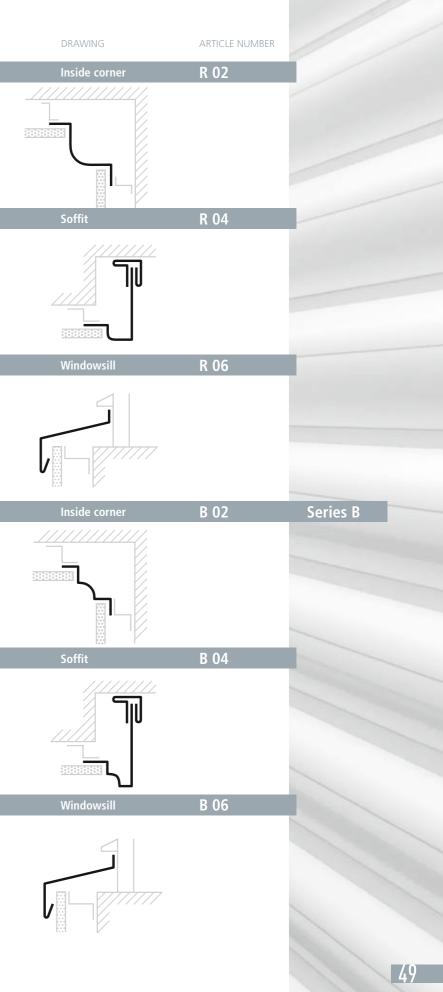


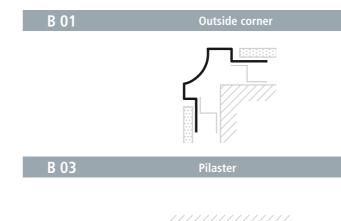




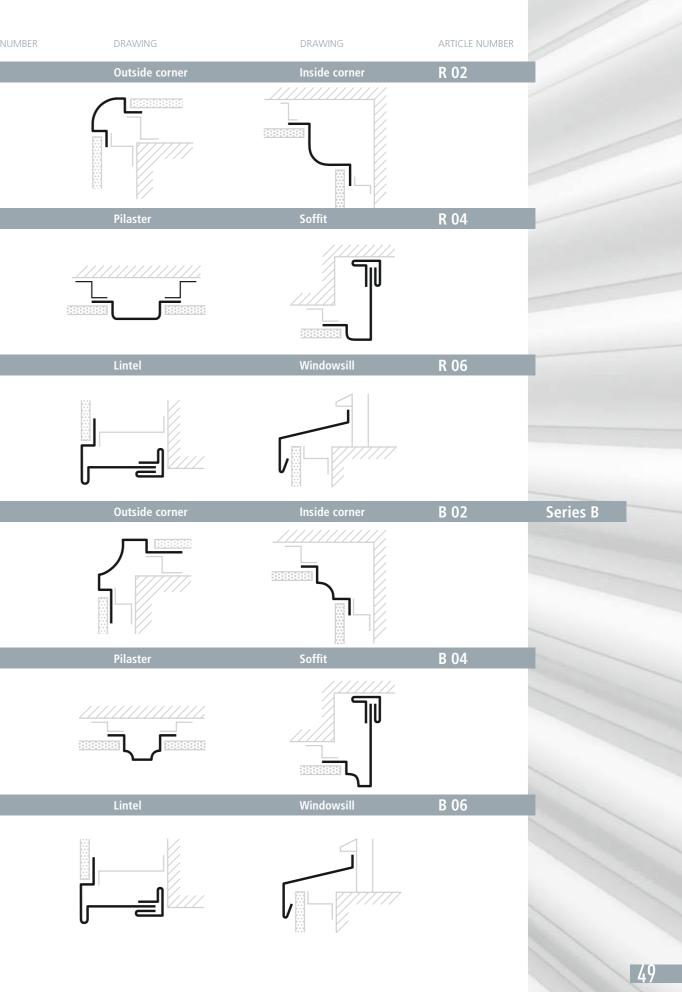




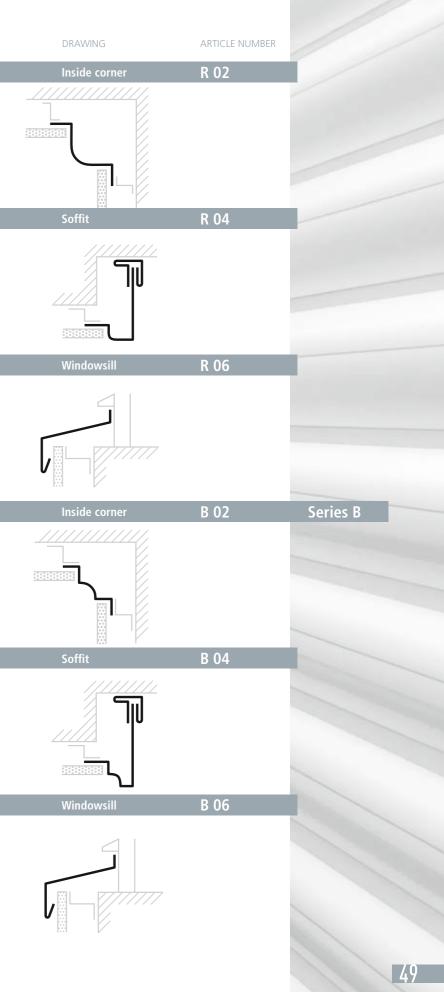




ARTICLE NUMBER

E 05



E 01 E 02 E 03 E 04




DRAWING



DRAWING

ARTICLE NUMBER

E 06

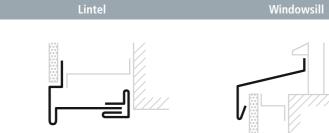




MN[®]

MN[®] Flashings series K

Flashings series S

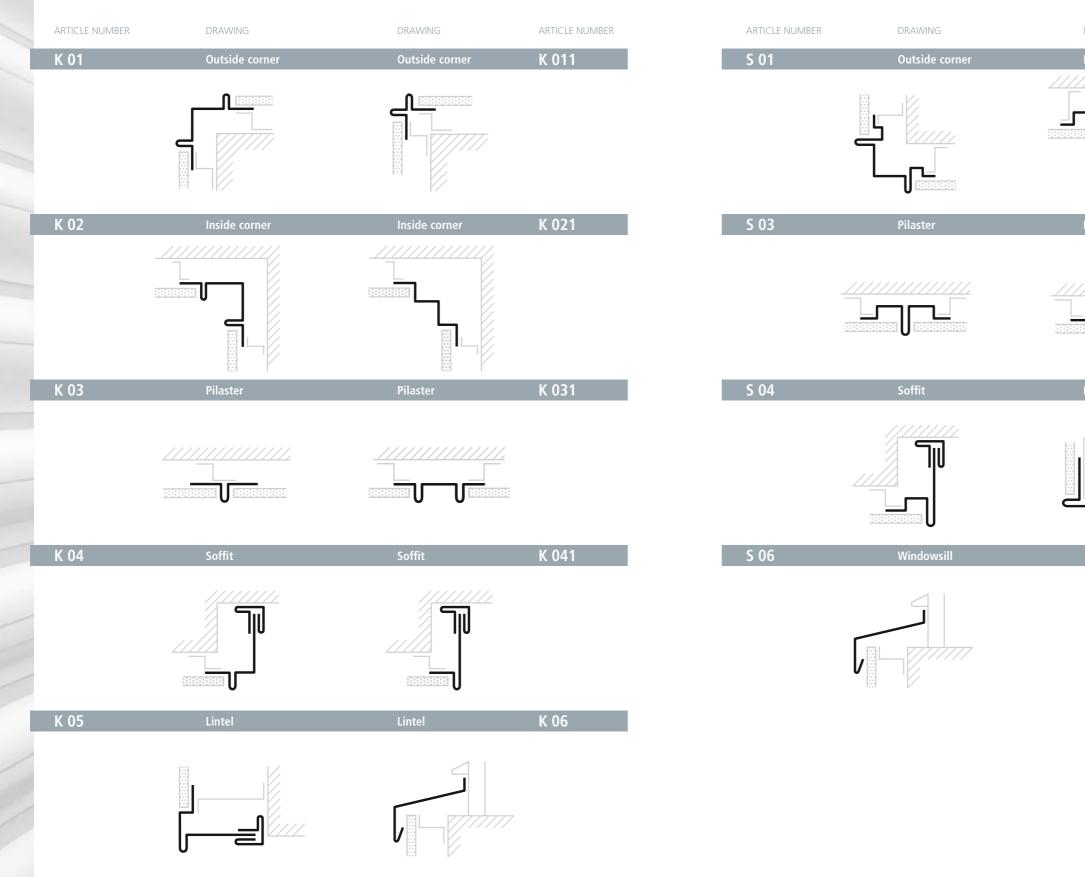




DRAWING	ARTICLE NUMBER	/ /
Inside corner	S 02	
Pilaster	S 31	
Lintel	S 05	
		51

MN[®]

Standard flashings Flashings made of steel, aluminium, stainless steel and titanium zinc

Standard flashings

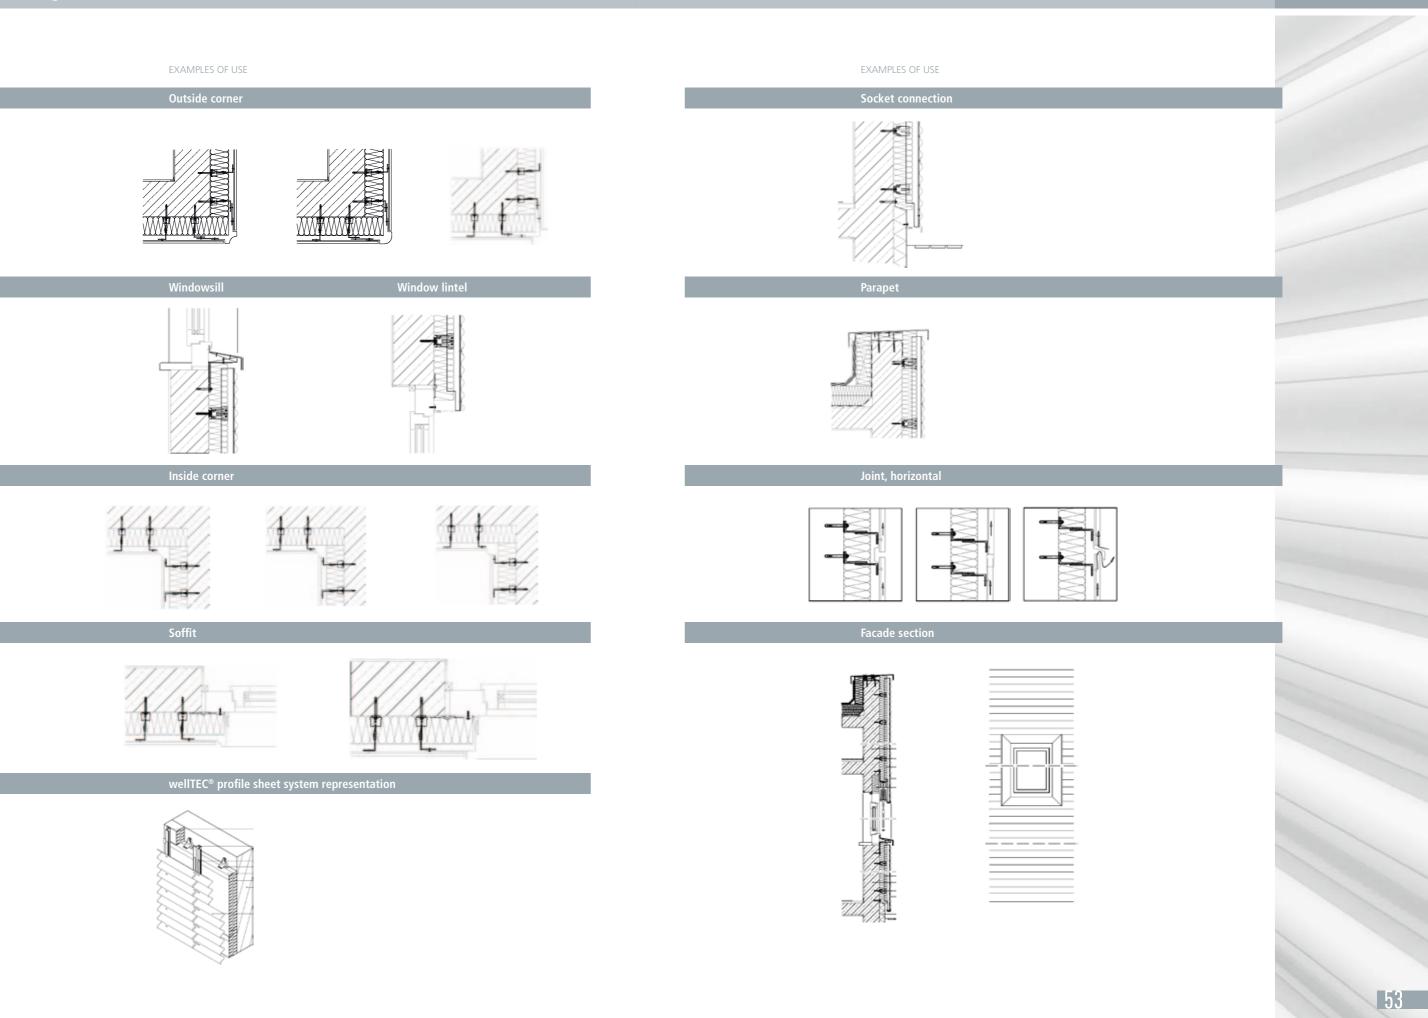



CONSULTING, PROJECT DESIGN, PRODUCTION MN METALL OFFERS MORE THAN HIGH-QUALITY BUILDING CLADDING


OTHER SERVICES BY MN METALL



In the area of commercial construction, MN Metall is one of the most reliable and modern manufacturers of building cladding. But far from resting on its laurels, MN Metall complements its building component production with a full-service programme that begins with consulting and planning and stretches all the way through to logistics management after pro-

duction. Our gualified employees are equipped with the necessary engineering expertise to grasp the complexity of a construction project and offer focused support and innovative solutions.

Discover our wide-ranging service portfolio for yourself - from customised and series production all the way to international projects.





TECHNOLOGY

additional costs.

ENVIRONMENTAL MANAGEMENT Environmentally friendly conduct should also - or perhaps particularly - be a focus of companies in the manufacturing industry. At MN Metall, the environment and sustainability play a pivotal role. This starts with minimising our use of natural resources (especially through recycling) and the reduction of pollution in production processes. Supplied materials have to meet high ecological standards in terms of their raw materials, production and processing. In addition to this, the high quality and durability of MN products makes a lasting contribution to the conservation of raw materials.

COIL SERVICECENTRE

In order to process metal, raw material is required. This is normally only available in standard trade sizes, which leads to a high level of wastage when it comes to processing special sizes. Thanks to the most modern coil servicecentre in Europe, MN can de-coil the basic material itself. Here, large aluminium or stainless coils with widths from 500 mm to 2,000 mm, thicknesses of up to 5 mm and weights of up to 25 t can be cut into individual sheets ranging from 150 mm to 8,000 mm in length and 100 mm to 2,000 mm in width. Based entirely on client requirements and with a minimum tolerance of just one thousandth of a millimetre on a length of 8,000 mm, blank and contour cuts are carried out and also meet the surface and edging needs of the automotive industry. As an MN client, you benefit from stable cost structures. customised

ity facade.





YOUR PROJECT DESERVES OUR FULL ATTENTION

Your construction project is important to us. For this reason, we dedicate our time and complete attention to your needs. Even during the developmental phase, our engineers and customer advisers can support architects and engineering firms by assuming tasks such as static calculations or planning. This enables the exploitation of important synergies at an early stage

of project conception, which could lead to increased construction quality and reduced costs later. Once the design of cladding elements has been completed, MN Metall collaborates with structural and facade engineers if the production of assembly and fixing profiles is required or logistic and assembly processes need to be optimised.



High dimensional accuracy and minimum manufacturing tolerances can only be achieved with powerful processing machines. MN Metall has state-of-the-art system technology that is continuously adapted to meet the latest requirements. During the planning phase, we use 3D CAD models that enable engineers to present the visions of the architect in the actual space and under real conditions. This means that a range of factors can be tested, including building stability, the effects of wind or gravity and the load transfer between elements. This leads to a reduction in work defects, construction delays and not least,

production options, an efficient value chain and a stunning, high-gual-

MN



















2D/3D lasers

Folding Bending

g Cutting

Welding

Punching

Coiling Profiling

Plasma cutting



lanagement system certified in ccordance with DIN EN ISO 900[°]

MN Metall GmbH · Industrieweg 34 · D-23730 Neustadt Tel.: +49 (0)4561/5179-0 · Fax: +49 (0)4561/5179-70 Email: info@mn-metall.de · Internet: www.mn-metall.de

